


Calibre Computer Video Cable

- 1) Description 3 x 75 Ohm Coax + 8 x AWG 24
2) Style IBM 75762 plus 4 extra data lines

Mechanical Data

- 3) Conductors 28AWG 7/36 Tinned Copper Wire 3 x Coax
 24AWG Tinned Copper Wire 8 x Singles
- 4) Insulation Foam polypropylene & PVC 3 x Coax
 Semi-Rigid PVC - 8 x AWG 24
- 5) Screens 3 x Coax individually screened using spiral lapped Tinned Copper Wire and Aluminium/Polyester tape bonded to jacket. Coaxes jacketed with PVC. Overall screen using Aluminium/Polyester tape and braided Tinned Copper Wire.
- 6) Construction 3 x Coax + 8 x AWG 24 cores with overall screen applied, then jacketed. Fillers and binding tapes may be incorporated as necessary.
- 7) Reference Drawing:

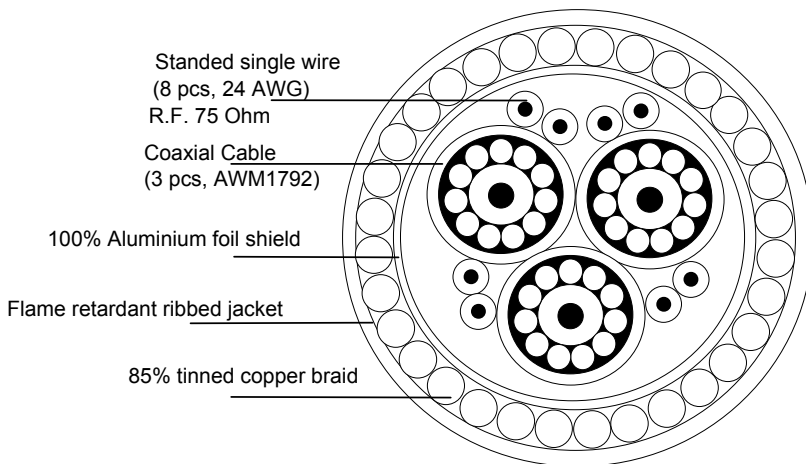

RGB CABLE
Not to scale

<p>Head Office</p> <p>Calibre UK Ltd Cornwall House, Cornwall Terrace, Bradford, West Yorkshire BD8 7JS, England</p> <p>Tel +44 (0)1274 394125 Fax +44 (0)1274 730960 E-mail sales@calibreuk.com Web-site www.calibreuk.com</p>	<p>USA Office</p> <p>Calibre UK Ltd PO Box 44 Fair Oaks CA 95628 USA</p> <p>Contact Ed Hart Tel 916 961 1261 E-mail edhart@calibreuk.com Web-site www.calibreuk.com</p>
---	---